


TAIDEN®

Digital IR Wireless Conference Microphone

Connection diagram

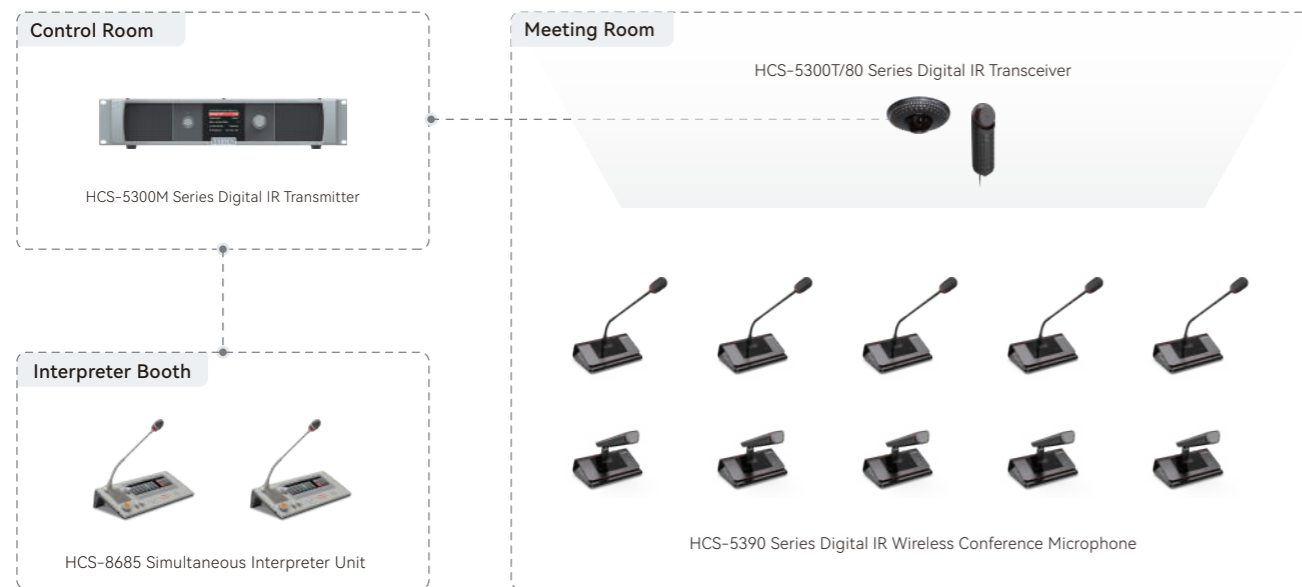

TAIDEN INDUSTRIAL CO., LTD.

6/F, Block B, Future Plaza, 4060 Qiaoxiang Rd,
Nanshan District, Shenzhen, China

TEL: (+86)400-077-0755

Website: www.aiden.com

Copyright ©202301 TAIDEN Industrial Co., Ltd. All Rights Reserved.

Digital IR Wireless Conference Microphone

The latest addition to TAIDEN's flagship infrared wireless range, HCS-5390 Series, delivers a versatile blend of aesthetic and proficient conference solutions. The system is characterized with sleek design and is built to last with its robustness and compatibility.

Innovative, Intuitive, Impressive
The ultimate wireless solution for conferences

What Makes the HCS-5390 Series Unique?

Innovative and minimalist design

HCS-5390 Series sports a striking new design with TAIDEN's user-centered philosophy at its core. The design is meant to embody bridging communication between participants inspired by the shape of a book.

Impressive audio reproduction

HCS-5390 is built from TAIDEN's proprietary dirATC—Digital Infrared Audio Transmission and Control Technology for steady reproduction of crystal-clear sound.

Intuitive and easy operation

HCS-5390 Series is a great combination of ergonomics and ease of use, optimizing the limited panel space to provide users with a more intuitive and smooth operating experience, also easy to set up and remove after use for storage.

Built for security

Anti-interference digital infrared technology guarantees conference privacy. Multiple adjacent rooms can be combined to accommodate larger groups.



Features

- Patented digital infrared audio transmission and control technology
- Discussing, voting and 1+7 channels of simultaneous interpretation
- Independent recording function for S.I. channels and automated camera tracking
- Controls up to 1000 conference units
- Unique ID preset for each unit
- Priority for the chairman unit to switch on/off or mute the active microphone
- Flexible ways of charging via charging dock, power adapter or battery pack charger
- Compatible with HCS-5100Plus Digital Infrared Language Distribution System
- Comprehensive management software
- Easy web server control

Pickup distance up to 100cm with 14mm microphone capsule

Speaking status light indicator

Easily replaceable stem microphone

Rich information display
(channel number, language name, IR signal, and battery level)

Durable aluminum enclosure

Visual impairment accessibility

Modularized control panel
Well balance between form and function

Function list

Model	Type	Discussion	SI	Voting	Microphone
HCS-5390C	Chairman	•	1+7 CHs	•	Pluggable Microphone
HCS-5390D	Delegate	•	1+7 CHs	•	
HCS-5390RC	Chairman	•	1+7 CHs	•	Rectangular columnar microphone
HCS-5390RD	Delegate	•	1+7 CHs	•	
HCS-5391C	Chairman	•			Pluggable Microphone
HCS-5391D	Delegate	•			
HCS-5391RC	Chairman	•			Rectangular columnar microphone
HCS-5391RD	Delegate	•			

ISO Compliant with ISO 22259

IEC Compliant with IEC 61603-7

 Free from RF interferences (2.4-5.6GHz)

Ultra-wide infrared signal receiving angle

Ø 3.5 mm TRRS stereo plug

Power On/Off, Volume control

HCS-5390 Series

HCS-5391R Series